



Contents

FLUID HEADS

FLATBASE 100MM

35	-----02
25N	-----03
22N	-----04
25	-----05

75MM

V16	-----06
V15	-----07
V14S	-----08
V14	-----09
V13	-----10

HEAD&TRIPOD KIT SYSTEM

100MM

C35VTS	-----12
A35VTS	-----13
C25VTS	-----14
A25VTS	-----15
C22VTS	-----16
A22VTS	-----17
1526C	-----18
1526A	-----19
3822C	-----20
3816C	-----21

75MM

3514C	-----22
3514A	-----23
1516C	-----24
1516A	-----25
1505C	-----26
1515A	-----27
1514C	-----28
1514A	-----29
1514SC	-----30
1514SA	-----31
1513C	-----32
1513A	-----33

MONOPOD

3513MC	-----34
3513MC	-----35

TRIPOD

V394C	-----37
V364A/V364C	-----38
V334A/V334C	-----39
V32C2	-----40

V32A2	-----41
V26A3/V26C3	-----42
V25A3/V25C3	-----43

ACCESSORIES-----44/45



35 Fluid Head



The 35 head specifically designed to support the wide variety of new ENG cameras, With its broad range of payloads – 2.5 kg (5.5 lbs) to 25 kg (55 lbs) -it aims to become the ideal partner for all news gathering and outdoor shooting jobs.

Rugged but easy to operate the new Fluid Head has all the ergonomic settings at the right place. Fluid drag in both pan and tilt are both nice with positive locks, wide range sliding platform, quick release plate, a switchable illuminated spirit level completes the operating specs. It interfaces with all 100mm bowl base tripods.


VIDEO HEAD PARAMETERS

Material:	Milled Aluminum	payload:	25kg/55lbs
Counterbalance steps :	16	Sections:	/
Damping:	9 horizontal and vertical grades of drag	Weight:	6kg/13.2lbs
Tilt range:	+90° to -60°	Head fitting:	100mm
Slide range:	160 mm	Length:	260mm
Temperature range:	-40° – 60°c	Level:	yes

25N Fluid Head



RELATED ACCESSORIES

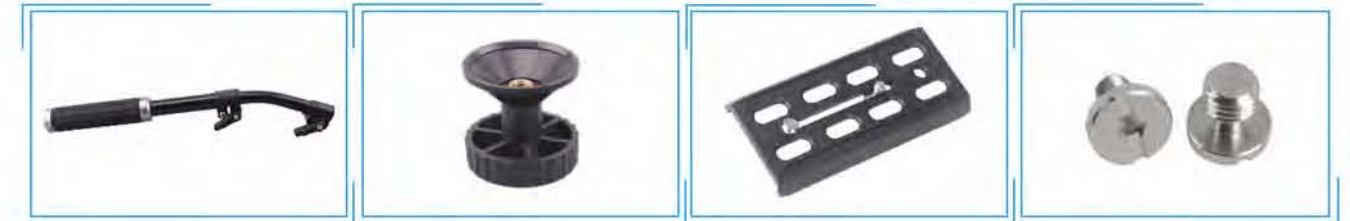

VIDEO HEAD PARAMETERS

Material:	Milled Aluminum	payload:	15Kg/33lbs
Counterbalance steps :	10	Sections:	/
Damping:	7 horizontal and vertical grades of drag	Weight:	3.44kg/7.57lbs
Tilt range:	+90° to -60°	Head fitting:	100mm
Slide range:	140mm	Length:	260mm
Temperature range:	-40° – 60°c	Level:	yes

22N Fluid Head



RELATED ACCESSORIES



VIDEO HEAD PARAMETERS

Material:	Milled Aluminum	payload:	12kg/26.4lbs
Counterbalance steps :	8	Sections:	/
Damping:	3 horizontal and vertical grades of drag	Weight:	3.3kg/7.26lbs
Tilt range:	+90° to -60°	Head fitting:	100mm
Slide range:	140mm	Length:	260mm
Temperature range:	-40° – 60°c	Level:	yes

15 Fluid Head



The 25 Head is the ideal support for the latest HDV cameras weighing from 0 to 15 kg (0 to 33 lbs). Equipped with a quick release sliding camera plate, illuminated spirit level and telescopic pan bar. Its tilting range is +90° /- 60° with perfect response throughout the entire tilt range. It interfaces with all 100 mm bowl base tripods and supports.

The extreme ruggedness and versatility together with an outstanding quality/price makes it best possible support for news operators and HDV videographers.

VIDEO HEAD PARAMETERS

Material:	Milled Aluminum	payload:	15kg/33lbs
Counterbalance steps :	10	Sections:	/
Damping:	7 horizontal and vertical grades of drag	Weight:	3.44kg/7.57lbs
Tilt range:	+90° to -60°	Head fitting:	100mm
Slide range:	140mm	Length:	260mm
Temperature range:	-40° – 60°c	Level:	yes

V16 Fluid Head



The V16 Fluid Head is the ideal support for the latest ultra-lightweight cameras weighing from 0 to 6Kg (13.2lbs). Which is extremely compact and lightweight. The Fluid Head comes equipped with a sliding camera plate compatible with Manfrotto standard plates, spirit level and orientable pan bar. Its tilt angle is +90°/- 60° with perfect response throughout the entire tilt range. It interfaces with all 75mm bowl base tripods and supports. The head features a built in 1/4"-20 & 3/8" accessory socket for available accessory items. The super quality and nice price makes it the best possible support for its range.

VIDEO HEAD PARAMETERS

Material: Milled Aluminum	payload: 6KG/13.2lbs
Counterbalance steps : fixed	Sections: /
Damping: fixed	Weight: 1.8KG/3.96lbs
Tilt range: +90° to -60°	Head fitting: 75mm
Slide range: 100mm-205mm	Length: 135mm
Temperature range: -40° - 60°c	Level: yes

V15 Fluid Head



The V15 Fluid Head is the ideal support for the latest ultra-lightweight cameras weighing from 0 to 5Kg (11lbs). Which is extremely compact and lightweight. The Fluid Head comes equipped with a sliding camera plate compatible with Manfrotto standard plates, spirit level and orientable pan bar. Its tilt angle is +90°/- 60° with perfect response throughout the entire tilt range. It interfaces with all 75mm bowl base tripods and supports. The head features a built in 1/4"-20 & 3/8" accessory socket for available accessory items. The super quality and nice price makes it the best possible support for its range.

VIDEO HEAD PARAMETERS

Material: Milled Aluminum	payload: 5Kg/ 11lbs
Counterbalance steps : fixed	Sections: /
Damping: fixed	Weight: 1.2KG/2.64lbs
Tilt range: +90° to -60°	Head fitting: 75mm
Slide range: 125mm~205mm	Length: 135mm
Temperature range: -40° - 60°c	Level: yes

14S Fluid Video Head



The 14S Fluid Head is the ideal support for the latest ultra-lightweight cameras weighing from 0 to 4Kg (8.8lbs). Which is extremely compact and lightweight. The Fluid Head comes equipped with a sliding camera plate compatible with Manfrotto standard plates, spirit level and orientable pan bar. Its tilt angle is +90°/- 60° with perfect response throughout the entire tilt range. It interfaces with all 75mm bowl base tripods and supports. The head features a built in 1/4"-20 & 3/8" accessory socket for available accessory items. The super quality and nice price makes it the best possible support for its range.

VIDEO HEAD PARAMETERS

Material: Milled Aluminum	payload: 4Kg/8.8 lbs
Counterbalance steps : fixed	Sections: /
Damping: fixed	Weight: 1.15kg/2.53lbs
Tilt range: +90° to -60°	Head fitting: 75mm
Slide range: 130-280mm	Length: 125mm
Temperature range: -40° - 60°c	Level: yes

V14 Fluid Video Head



The V14 Fluid Head is the ideal support for the latest ultra-lightweight cameras weighing from 0 to 4Kg (8.8lbs). Which is extremely compact and lightweight. The Fluid Head comes equipped with a sliding camera plate compatible with Manfrotto standard plates, spirit level and orientable pan bar. Its tilt angle is +90°/- 60° with perfect response throughout the entire tilt range. It interfaces with all 75mm bowl base tripods and supports. The head features a built in 1/4"-20 & 3/8" accessory socket for available accessory items. The super quality and nice price makes it the best possible support for its range.

VIDEO HEAD PARAMETERS

Material: Milled Aluminum	payload: 4Kg/8.8 lbs
Counterbalance steps : fixed	Sections: /
Damping: fixed	Weight: 1.25KG/2.75
Tilt range: +90° to -60°	Head fitting: 75mm
Slide range: 130mm~300mm	Length: 135mm
Temperature range: -40° - 60°c	Level: yes

V13 Fluid Head



The V13 Fluid Head is the ideal support for the latest ultra-lightweight cameras weighing from 0 to 4.5Kg (9.9lbs). Which is extremely compact and lightweight. The Fluid Head comes equipped with a sliding camera plate compatible with Manfrotto standard plates, spirit level and orientable pan bar. Its tilt angle is +90°- 60° with perfect response throughout the entire tilt range. It interfaces with all 75mm bowl base tripods and supports. The head features a built in 1/4"-20 & 3/8" accessory socket for available accessory items. The super quality and nice price makes it the best possible support for its range.

VIDEO HEAD PARAMETERS

 Material:	Milled Aluminum	 payload:	4.5Kg/9.9lbs
 Counterbalance steps:	fixed	 Sections:	1
 Damping:	fixed	 Weight:	1.09KG/2.4lbs
 Tilt range:	+90° to -60°	 Head fitting:	75mm
 Slide range:	80mm~145mm	 Length:	125mm
 Temperature range:	-40° - 60°c	 Level:	yes

VIDEO TRIPOD

THE FILM AND TELEVISION SERIES



C35VTS

Carbon fiber video tripod system



RELATED ACCESSORIES



VIDEO TRIPOD PARAMETERS

Item(Kit model):	Counterbalance steps: 16
Head model:	Height range: 730mm-1618mm
Leg model:	Head fitting: 100 mm
Spreader: Ground spreader	Transport length: 1040mm
Weight: 12kg/26.4lbs	Material: Carbon fiber
Payload: 25kg/55lbs	Damping: 9 horizontal and vertical grades of drag

A35VTS

Aluminum video tripod system



This Heavy Duty 1 Stage tripod system consists of 100mm fluid head and robust HD tripod, features include advanced precision drag with soft take offs, smooth stops and well balanced diagonal drag transition and 16 position counterbalance systems controlled through a rear mounted illuminated 'all in one location' operating layout. Ideal for all set-ups Payload up to 25kg , the reliable fluid head offers the Snap & Go side-loading mechanism. This enables set-ups to be mounted quickly and easily from the side of the tripod. the tripods comes with Speed-balance technology, illuminated levelling bubble and parking position for spare camera screws.it is a most desirable package for professional Sports, Studio, EFP and Outside Broadcast .

C25 VTS

Carbon fiber video tripod system



RELATED ACCESSORIES



VIDEO TRIPOD PARAMETERS

Item(Kit model):	Counterbalance steps: 10
Head model:	Height range: 880mm-1770mm
Leg model:	Head fitting: 100 mm
Spreader: Mid-level spreader	Transport length: 910mm
Weight: 6.7kg/14.74lbs	Material: Carbon fiber
Payload: 15kg/33lbs	Damping: 7 horizontal and vertical grades of drag

A25 VTS

Aluminum video tripod system



The tripod kit come with 1 handle, 2 stages aluminum/carbon DSLR/UHD Tripod, mid-level Spreader and rubber feet. This System includes a carry bag,which is an ideal tripod system for lightweight and small video cameras. Counterbalance is installed,It provides an easy step to advance your video shooting. The head fitting is 100 mm class and perfectly supports today's digital cinema-style cameras

C22VTS

Carbon fiber video tripod system



RELATED ACCESSORIES



VIDEO TRIPOD PARAMETERS

Item(Kit model):	Counterbalance steps: 8
Head model:	Height range: 880mm-1770mm
Leg model:	Head fitting: 100 mm
Spreader: Mid-level spreader	Transport length: 910mm
Weight: 6.7kg/14.74lbs	Material: Carbon fiber
Payload: 12kg/26.4lbs	Damping: 3 horizontal and vertical grades of drag

A22VTS

Aluminum video tripod system



The tripod kit come with 1 handle, 2 stages aluminum/carbon DSLR/UHD Tripod, mid-level Spreader and rubber feet. This System includes a carry bag,which is an ideal tripod system for lightweight and small video cameras. Counterbalance is installed,It provides an easy step to advance your video shooting. The head fitting is 100 mm class and perfectly supports today's digital cinema-style cameras

2526C

Carbon fiber video tripod system



RELATED ACCESSORIES



VIDEO TRIPOD PARAMETERS

Item(Kit model):	Counterbalance steps: 10
Head model:	Height range: 880mm-1770mm
Leg model:	Head fitting: 100 mm
Spreader: Mid-level spreader	Transport length: 910mm
Weight: 6.7kg/14.74lbs	Material: Carbon fiber
Payload: 15kg/33lbs	Damping: 7 horizontal and vertical grades of drag

2526A

Aluminum video tripod system



This tripod with fluid video head combines all the classic features you'd expect plus innovative locking system on the leg makes it perfect. Both lightweight and robust, it can support up to 15kg(33lbs). CNC Precision guarantee the quality, Fluid head with nice function give you all the control you need when getting into position.

Adding to its impressive list of design features, you can slide your camera into position from above, the twist lock makes it more easier and time saving when setting up. Besides, the tripod itself is a 3-section stand with strong but lightweight carbon fibre leg tubes, That makes transportation extra easy.

3822C

Carbon fiber video tripod system



This tripod with fluid video head combines all the classic features you'd expect plus innovative locking system on the leg makes it perfectly. Both lightweight and robust, it can support up to 12kg(26.4lbs). CNC Precision guarantee the quality, Fluid head with nice function give you all the control you need when getting into position.

Adding to its impressive list of design features, you can slide your camera into position from above, the twist lock makes it more easier and time saving when setting up. Besides, the tripod itself is a 4-section stand with strong, but lightweight carbon fiber leg tubes. This makes transporting extra easy.

3816C

Carbon fiber video tripod system



RELATED ACCESSORIES



VIDEO TRIPOD PARAMETERS

Item(Kit model):	Counterbalance steps: fixed
Head model:	Height range: 350mm-1845mm
Leg model:	Head fitting: 75 mm
Spreader: /	Transport length: 750mm
Weight: 4.73KG/10.4LBS	Material: Carbon fiber
Payload: 6kg/13.2lbs	Damping: fixed

3604C

Carbon fiber video tripod system



RELATED ACCESSORIES



VIDEO TRIPOD PARAMETERS

Item(Kit model):	Counterbalance steps: fixed
Head model:	Height range: 350mm-1845mm
Leg model:	Head fitting: 75 mm
Spreader: /	Transport length: 745mm
Weight: 3.83KG/8.43LBS	Material: Carbon fiber
Payload: 4kg/8.8lbs	Damping: fixed

3604A

Aluminum video tripod system



This tripod with fluid video head combines all the classic features you'd expect plus innovative locking system on the leg makes it perfect. Both lightweight and robust, it can support up to 4kg(8.8lbs).CNC Precision guarantee the quality, Fluid head with nice function give you all the control you need when getting into position.

Adding to its impressive list of design features, you can slide your camera into position from above, the twist lock makes it more easier and time saving when setting up. Besides, the tripod itself is a 4-section stand with strong but lightweight carbon fibre leg tubes, That makes transportation extra easy.

1606C

Carbon fiber video tripod system



This tripod with fluid video head combines all the classic features you'd expect plus innovative locking system on the leg makes it perfectly. Both lightweight and robust, it can support up to 6kg(13.2lbs). CNC Precision guarantee the quality, Fluid head with nice function give you all the control you need when getting into position.

Adding to its impressive list of design features, you can slide your camera into position from above, the twist lock makes it easier and time saving when setting up. Besides, the tripod itself is a 3-section stand with strong but lightweight carbon fibre leg tubes, That makes transporting extra easy.

1606A

Aluminum video tripod system



RELATED ACCESSORIES



VIDEO TRIPOD PARAMETERS

Item(Kit model):	Counterbalance steps: fixed
Head model:	Height range: 690mm-1450mm
Leg model:	Head fitting: 75 mm
Spreader: Mid-level spreader	Transport length: 695mm
Weight: 9.64lbs	Material: Milled Aluminum
Payload: 6kg/13.2lbs	Damping: fixed

1515C

Carbon fiber video tripod system



The tripod kit come with 1 handle, 2 stages aluminum/carbon DSLR/UHD Tripod, mid-level Spreader and rubber feet. This System includes a carry bag,which is an ideal tripod system for lightweight and small video cameras.

RELATED ACCESSORIES



1515A

Aluminum video tripod system



VIDEO TRIPOD PARAMETERS

Item(Kit model):	Counterbalance steps: fixed
Head model:	Height range: 690mm-1437mm
Leg model:	Head fitting: 75 mm
Spreader: Mid-level spreader	Transport length: 695mm
Weight: 3.77kg/8.29lbs	Material: Milled Aluminum
Payload: 5KG/11lbs	Damping: fixed

1515C

Carbon fiber video tripod system



The tripod kit come with 1 handle, 2 stages aluminum/carbon DSLR/UHD Tripod, mid-level Spreader and rubber feet. This System includes a carry bag,which is an ideal tripod system for lightweight and small video cameras.

RELATED ACCESSORIES



1515A

Aluminum video tripod system



VIDEO TRIPOD PARAMETERS

Item(Kit model):		Counterbalance steps: fixed
Head model:		Height range: 690mm-1437mm
Leg model:		Head fitting: 75 mm
Spreader: Mid-level spreader		Transport length: 695mm
Weight: 3.77kg/8.29lbs		Material: Milled Aluminum
Payload: 5KG/11lbs		Damping: fixed

1513C

Carbon fiber video tripod system



RELATED ACCESSORIES



The tripod kit come with 1 handle, 2 stages aluminum/carbon DSLR/UHD Tripod, mid-level Spreader and rubber feet. This System includes a carry bag, which is an ideal tripod system for lightweight and small video cameras.

1513A

Aluminum video tripod system



VIDEO TRIPOD PARAMETERS

Item(Kit model):	Counterbalance steps: fixed
Head model:	Height range: 685mm-1445mm
Leg model:	Head fitting: 75 mm
Spreader: Mid-level spreader	Transport length: 685mm
Weight: 3.16kg/6.95lbs	Material: Milled Aluminum
Payload: 4.5KG/9.9lbs	Damping: fixed

1514SC

Carbon fiber video tripod system



RELATED ACCESSORIES



The tripod kit come with 1 handle, 2 stages aluminum/carbon DSLR/UHD Tripod, mid-level Spreader and rubber feet. This System includes a carry bag, which is an ideal tripod system for lightweight and small video cameras.

1514SA

Aluminum video tripod system



VIDEO TRIPOD PARAMETERS

Item(Kit model):	Counterbalance steps: fixed
Head model:	Height range: 690mm-1437mm
Leg model:	Head fitting: 75 mm
Spreader: Mid-level spreader	Transport length: 685mm
Weight: 3.26kg/7.17lbs	Material: Milled Aluminum
Payload: 4kg/8.8lbs	Damping: fixed

3513MC Monopod



The Monopod is a new professional full fluid video monopod made to satisfy videographers, high-performance solution they can easily carry when they are travelling. It is lightweight carbon fiber monopod mount the full fluid base. The video base enables the ultimate shooting smoothness on pan, tilt and swivel for an expanded range of perspectives. The three retractable feet make it extremely portable when folded and allow the monopod to be easily carried everywhere.

Its 100% carbon fibre tubes ensure the monopod's high rigidity while better absorbing micro movements to ensure excellent image quality. Also it comes with dual 1/4" - 3/8" photo and camcorder fixing screw, makes it more versatile.

3513MC Monopod



VIDEO TRIPOD PARAMETERS

Item(Kit model):	Counterbalance steps: fixed
Head model:	Height range: 655mm-1930mm
Leg model:	Head fitting: 75 mm
Spreader: /	Transport length: 655mm
Weight: 1.16kg/2.55lbs	Material: Carbon fiber
Payload: 4kg/8.8lbs	Damping: fixed

CARBON FIBER TUBES

THE FILM AND TELEVISION SERIES

V384C



The professional Stabulo 3 stages ENG ultra-light tripod is an extremely compact, lightweight Tripod .Extension is secured by 3 rotating locks on each leg while each leg can be set to 3 different angle locks, clearly indicated on each side of the leg attachment, with no need of a spreader to keep position.

The tripod with a standard 75 mm bowl diameter.Which is also ideally matching with Gizomos Fluid Head, this perfect combination especially for news reporters and wildlife operators .

VIDEO TRIPOD PARAMETERS

 Leg model:	 Height range: 235mm-1730mm
 Weight: 2.93kg/6.45lbs	 Transport length: 640mm
 Payload: 25kg/55lbs	 Material: Carbon fiber
 Head fitting: 75 mm	 Sections: 4

V364A/V364C



The professional 3 stages ENG ultra-light tripod is an extremely compact, lightweight Tripod .Extension is secured by 3 rotating locks on each leg while each leg can be set to 3 different angle locks makes it more stable.

The tripod goes with a standard 75 mm bowl diameter. Also ideally matching with the Fluid Head, this perfect combination especially for news reporters and wildlife operators .

VIDEO TRIPOD PARAMETERS

Leg model:	Height range: 235mm-1725mm
Weight: 2.95KG/6.49lbs	Transport length: 635mm
Payload: 25kg/55lbs	Material: Milled Aluminum
Head fitting: 75 mm	Sections: 4

V334A/V334C



The professional Stabilo 3 stages ENG ultra-light tripod is an extremely compact, lightweight Tripod .Extension is secured by 3 rotating locks on each leg while each leg can be set to 3 different angle locks, clearly indicated on each side of the leg attachment, with no need of a spreader to keep position.

The tripod with a standard 75 mm bowl diameter.Which is also ideally matching with Fluid Head, this perfect combination especially for news reporters and wildlife operators .

VIDEO TRIPOD PARAMETERS

Leg model:	Height range: 235mm-1720mm
Weight: 2.35kg/5.17lbs	Transport length: 630mm
Payload: 25kg/55lbs	Material: Milled Aluminum
Head fitting: 75 mm	Sections: 4

V32C2

Carbon fiber video tripod



The professional 1 stages ENG ultra-light tripod is an extremely compact, lightweight Tripod .The tripod goes with a standard 100 mm bowl diameter.

Also ideally matching with the Fluid Head, this perfect combination especially for news reporters and wildlife operators . This ENG lightweight tripod is Ideally completed by built-in Spreader and pivoting rubber feet

V32A2

Aluminum video tripod



VIDEO TRIPOD PARAMETERS

 Leg model:	 Height range: 550mm-1430mm
 Weight: 6.35kg/13.97lbs	 Transport length: 850mm
 Payload: 45kg/99lbs	 Material: Milled Aluminum
 Head fitting: 100 mm	 Sections: 2

V26A3/V26C3



The professional 2 stages ENG ultra-light tripod is an extremely compact, lightweight Tripod. Flip lever leg locks makes opening ,positionig and closing fast and easy.

The tripod goes with a standard 100 mm or 75 mm bowl diameter. Also ideally matching with the Fluid Head, this perfect combination especially for news reporters and wildlife operators .

VIDEO TRIPOD PARAMETERS

Leg model:	Height range: 655mm-1570mm
Weight: 3.44kg/7.57lbs	Transport length: 750mm
Payload: 30kg/66lbs	Material: Milled Aluminum
Head fitting: 100 mm	Sections: 3

V25C3/V25A3



The professional 2 stages ENG ultra-light tripod is an extremely compact, lightweight Tripod. Flip lever leg locks makes opening ,positioning and closing fast and easy.

The tripod goes with a standard 75 mm bowl diameter. Also ideally matching with the Fluid Head, this perfect combination especially for news reporters and wildlife operators .

VIDEO TRIPOD PARAMETERS

Leg model:	Height range: 560mm-1325mm
Weight: 1.70KG/3.74lbs	Transport length: 635mm
Payload: 15kg/33lbs	Material: Carbon fiber
Head fitting: 75 mm	Sections: 3

RELATED ACCESSORIES



H3



H1



H2



F1



S1



S2



B1



B2



P1



P2



P3



P4



P5